

## LED CEILING FIXTURE INSTRUCTIONS


### CAUTION

TURN OFF THE MAIN POWER AT THE CIRCUIT BREAKER BEFORE INSTALLING THE FIXTURE, IN ORDER TO PREVENT POSSIBLE SHOCK.




### GENERAL

- All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.
- Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

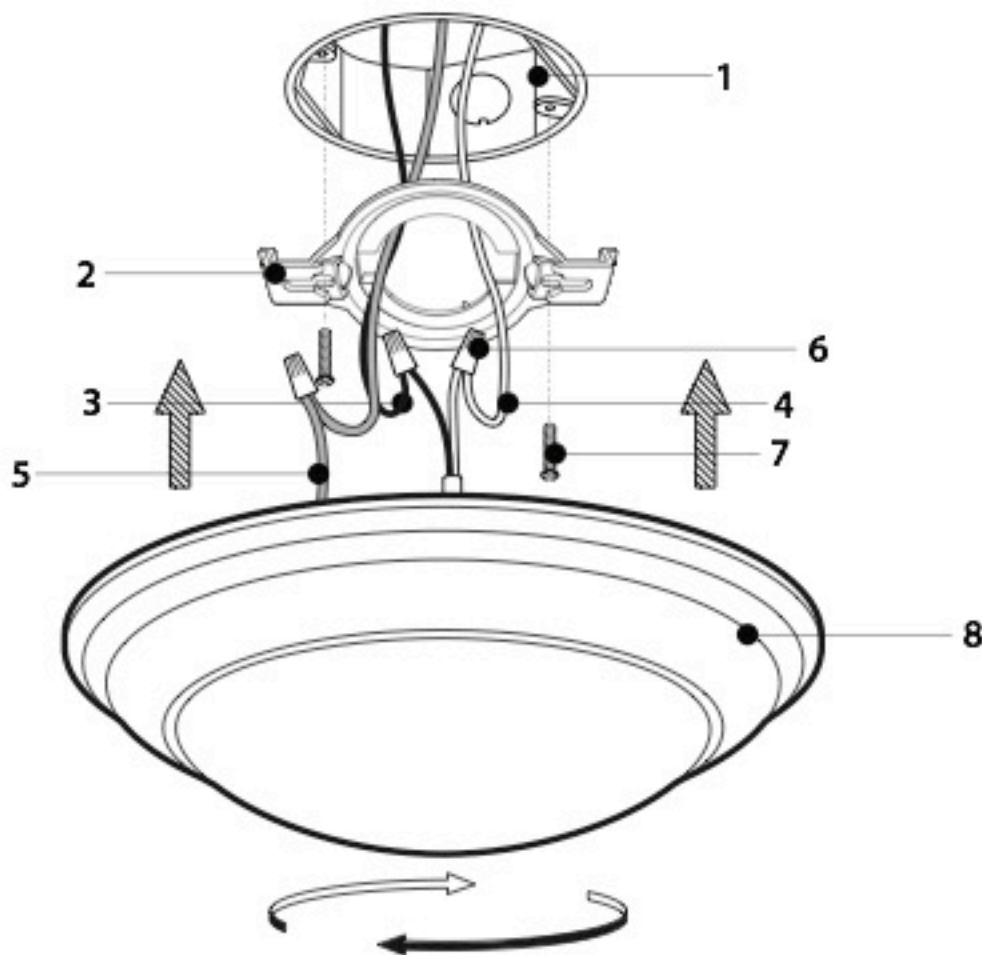

### PARTS INCLUDED:

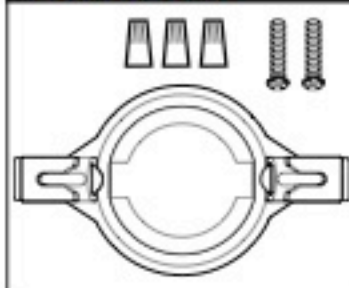

- Outlet Box (not included)
- Mounting Bracket (1 piece)
- Black Fixture Wire
- White Fixture Wire
- Ground Wire
- Wire Nut (3 pieces)
- Mounting Screws (2 pieces)
- Fixture (1 piece)

### MOUNTING INSTRUCTIONS

READ IMPORTANT SAFETY INFORMATION FIRST ON REVERSE SIDE OF THIS SHEET.

- Carefully unpack and unwrap fixture.
- Check that black (3), white (4) and ground wire(s) (5) are extending from the back of the fixture. Before wiring fixture to the power supply, turn off electricity at fuse or circuit breaker box. Fixture must be grounded to avoid potential electrical shock and to ensure reliable lamp starting.
- Secure MOUNTING BRACKET (2) to OUTLET BOX (1) by inserting the two MOUNTING SCREWS (7) through slots in Mounting Bracket.
- Lift fixture to outlet box. Using WIRE NUTS (6), connect GROUND WIRE (5) from fixture to green or bare copper ground (house) wire. If outlet box is grounded you may fasten fixture ground wire directly to outlet box. Connect WHITE FIXTURE WIRE (4) to neutral supply wire. Connect BLACK FIXTURE WIRE (3) to power supply wire.
- Secure FIXTURE (8) to MOUNTING BRACKET by twisting fixture clockwise against mounting bracket. Make sure fixture is firmly locked into place.

SAVE THESE INSTRUCTIONS.