

V-SHAPE DUSK TO DAWN SOLAR FLOOD LIGHT INSTALLATION INSTRUCTIONS

**PARTS INCLUDED**

- (1) Flood light
- (2) Fixture mounting screws
- (2) Anchors

**HOW SOLAR LIGHTS WORK**



Solar light has a solar panel that converts sunlight into electricity. During the day, the electricity converted by the solar panel is stored in the rechargeable battery. At night, the solar light is powered by the battery using the electricity stored during the day. The operating time depends on geographical location, daily weather conditions and season.

**Choosing the right location**

Select a location with full, direct sunlight. Do not install in shady areas as these areas will not allow the battery to be fully charged and will reduce nighttime working hours. Be sure that the selected location is not close to other nighttime light sources such as street lights or porch lights. These light sources may keep the solar lights from turning on automatically.

- **IP65 Wet rated for outdoor use**
- **Charging time: 6-8 hours**
- **Working time: Up to 6 hours on a full charge**

**Note:** Save these instructions for future reference.

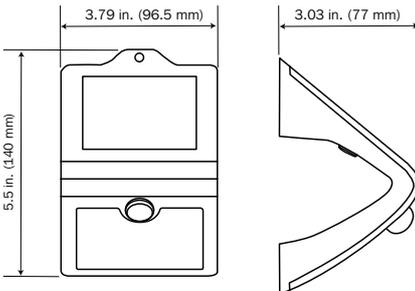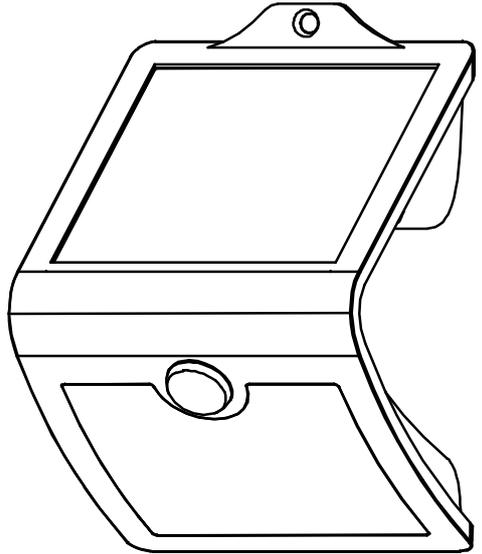

**LIMITED WARRANTY**


This product is warranted to be free from defects in workmanship and materials for up to 2 years from date of purchase. If it fails to do so, please contact Feit Electric at [info@feit.com](mailto:info@feit.com) or call 1-866-326-BULB (2852) for instructions on replacement. Do not return the product to the store.

For comments please write to:  
 Feit Electric  
 Customer Service Department  
 4901 Gregg Road, Pico Rivera, CA 90660

**Wall Mount Installation**


1. For hole A, drill a hole into a wall using a 6 mm drill bit and insert a screw anchor (Fig A). Insert a screw (provided) and tighten. Leave 3 mm of the screw sticking out to grasp the keyhole.

Fig A.





2. From hole A mark a distance upward 4.5 in. (116 mm) for hole B (Fig. B). Drill a hole into a wall using a 6 mm drill bit and insert a screw anchor.

Fig B.

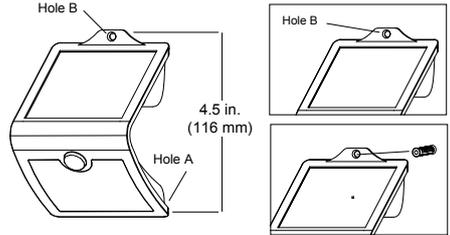

3. Align the top of fixture to the hole created and insert a screw (provided) into hole B and tighten (Fig. C).

Fig C.

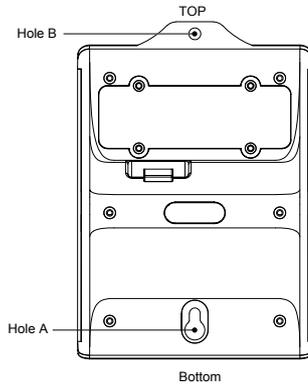

**Light Operation Settings:**

Switch Location	Mode
OFF	Unit Off
ON	When motion is detected, the lamp will turn on at 100% brightness for 20 seconds, then the light output will reduce to about 10% of max light. If motion is detected again, the lamp will turn on to full brightness for another 20 seconds.
AUTO	When motion is detected, the product will turn ON for about 1 minute then turn off.

**BATTERY REPLACEMENT**

To replace the battery, unscrew the battery cover, remove the old battery and insert a new Lithium-Ion 18650 3.7V minimum 1500mAh.

**WINTER TIPS**

Keep debris and snow off the solar panel to allow the battery to recharge. If lights have been covered by snow for a long time, allow batteries to recharge in full, direct sunlight for at least 8 hours so they can maintain maximum capacity.

**QUESTIONS, PROBLEMS, MISSING PARTS**

Before returning to the store, please call our Customer Service team at Toll Free 1-866-326-BULB (2852) or at info@feit.com